


# SG15 STEAM GENERATOR & STEAM CABINET




## SG15 STEAM GENERATOR SPECIFICATIONS:

- Fuel is No. 2 diesel
- Vented 8" chimney connection
- 120 volt electrical power supply at 20 amps
- Four minute steam at 45 lbs. (55° water to 300° steam temperature)
- 42 gallon fuel tank, 2 ¼ - 2 ½ gallon per hour usage
- Highly mobile with pull tongue and auto type steering
- All fittings and hose required for steam delivery are furnished
- Water supply – 45 PSI, ¾" hose and 3 GPM minimum
- "Clearwave" water conditioning for reduced lime build up
- Gauges for all adjustable controls and steam temperature monitoring
- Start up water diverter (manual) in the system
- One year warranty on all parts (freezing of unit excluded)

## STEAM CABINET FEATURES:


- 14 gauge polished stainless steel
- Gasket sealed, fully latching doors.
- Condensate drain in floor structure
- Available in 84" and 110" models

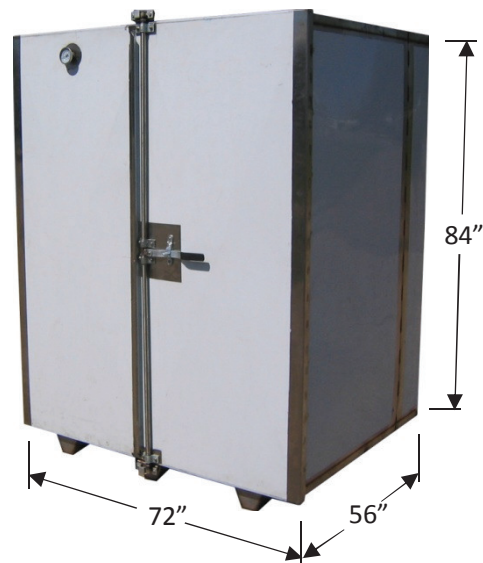

[www.GothicArchGreenhouses.com](http://www.GothicArchGreenhouses.com)

1-800-531-GROW  
PO Box 1564  
Mobile, Alabama 36633  
251-432-7529 (local)  
251-432-7972 (fax)  
[gothic@yellowhammer.com](mailto:gothic@yellowhammer.com)

# DOUBLE STEAM CABINET OPTION

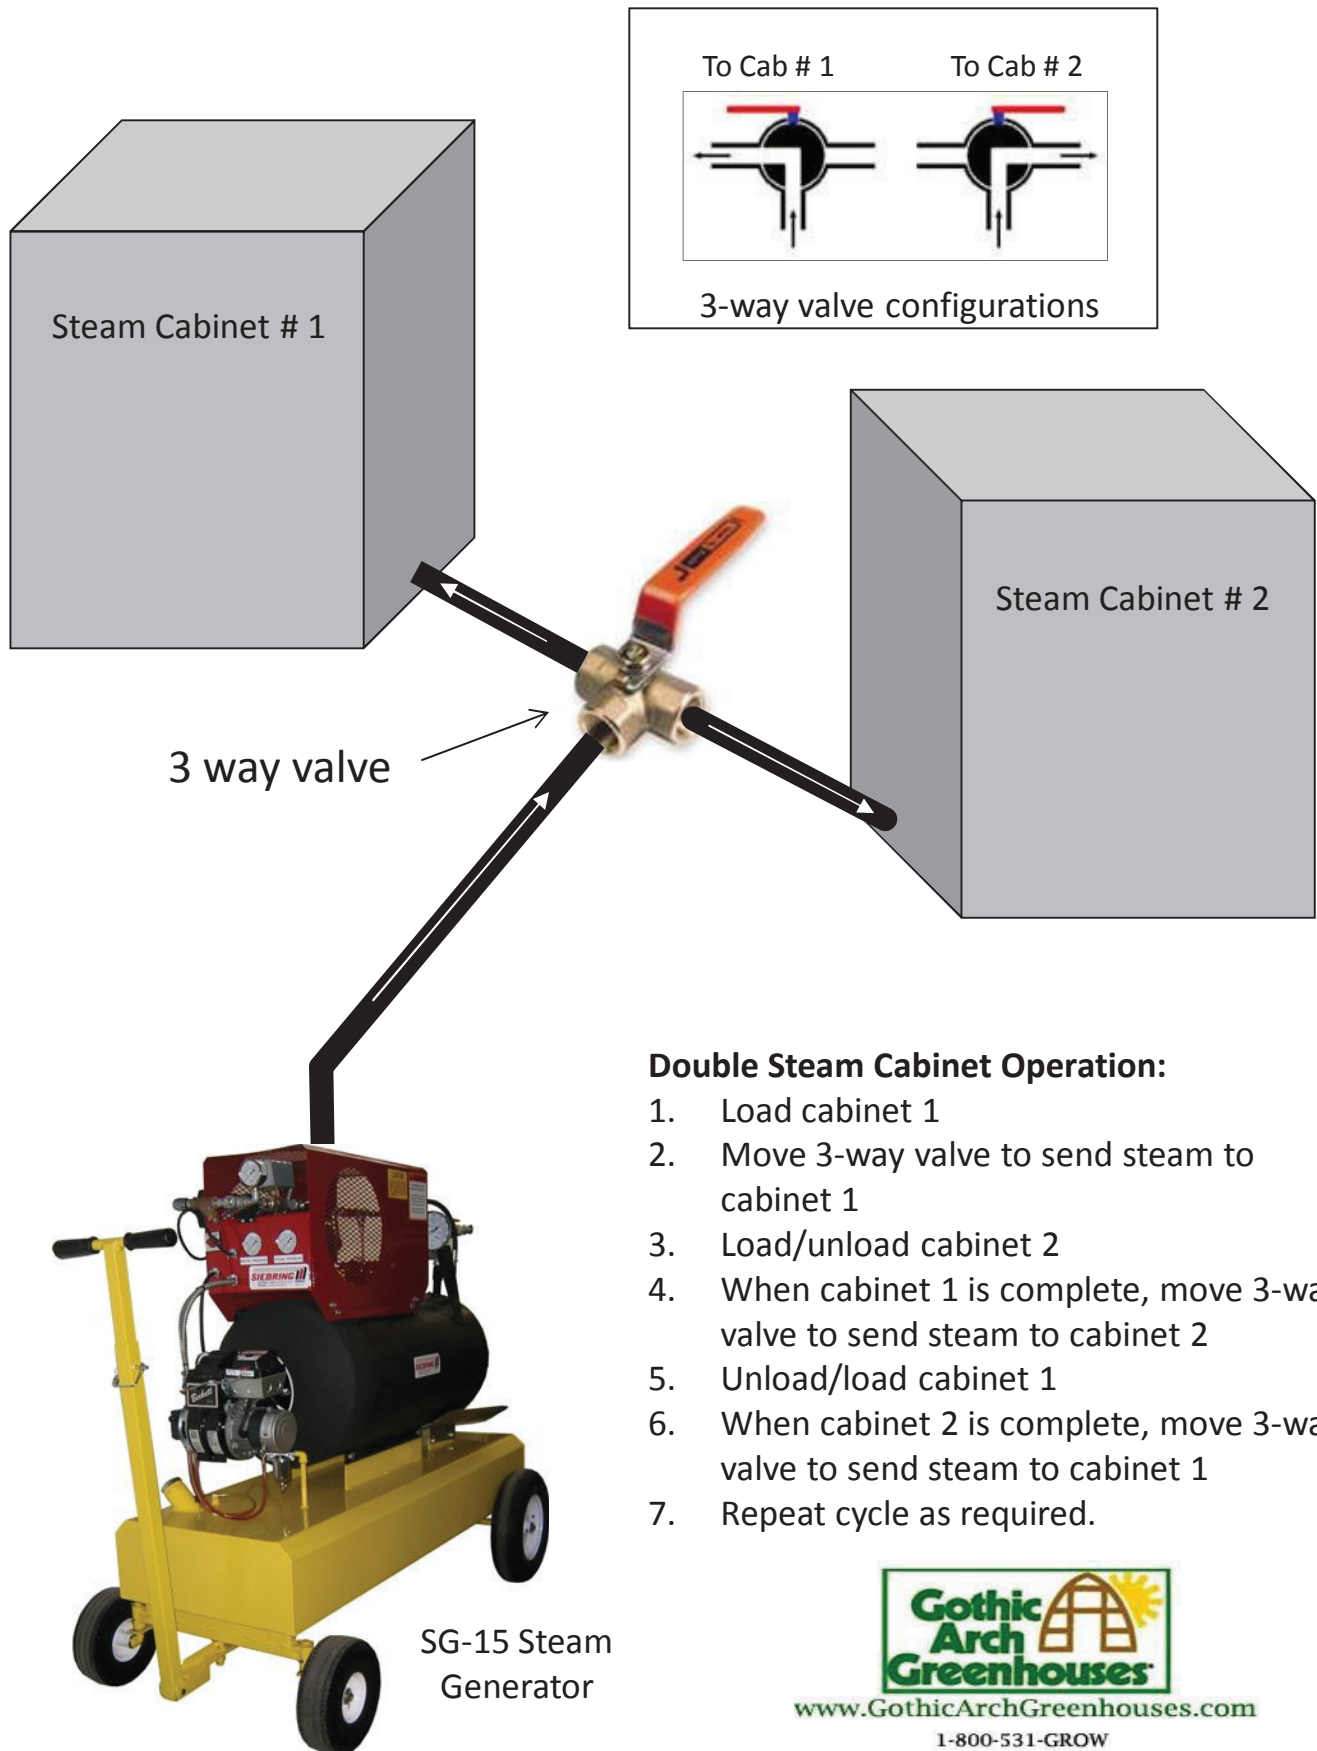

## Double Steam Cabinet Operation:

1. Load cabinet 1
2. Move 3-way valve to send steam to cabinet 1
3. Load/unload cabinet 2
4. When cabinet 1 is complete, move 3-way valve to send steam to cabinet 2
5. Unload/load cabinet 1
6. When cabinet 2 is complete, move 3-way valve to send steam to cabinet 1
7. Repeat cycle as required.



[www.GothicArchGreenhouses.com](http://www.GothicArchGreenhouses.com)

1-800-531-GROW  
PO Box 1564  
Mobile, Alabama 36633  
251-432-7529 (local)  
251-432-7972 (fax)  
[gothic@yellowhammer.com](mailto:gothic@yellowhammer.com)